


V:\CAD Files\B Dwg\B-5A Trash Enclosure Double.DWG 10-17-11 02:07:41 PM eli.mcfarland

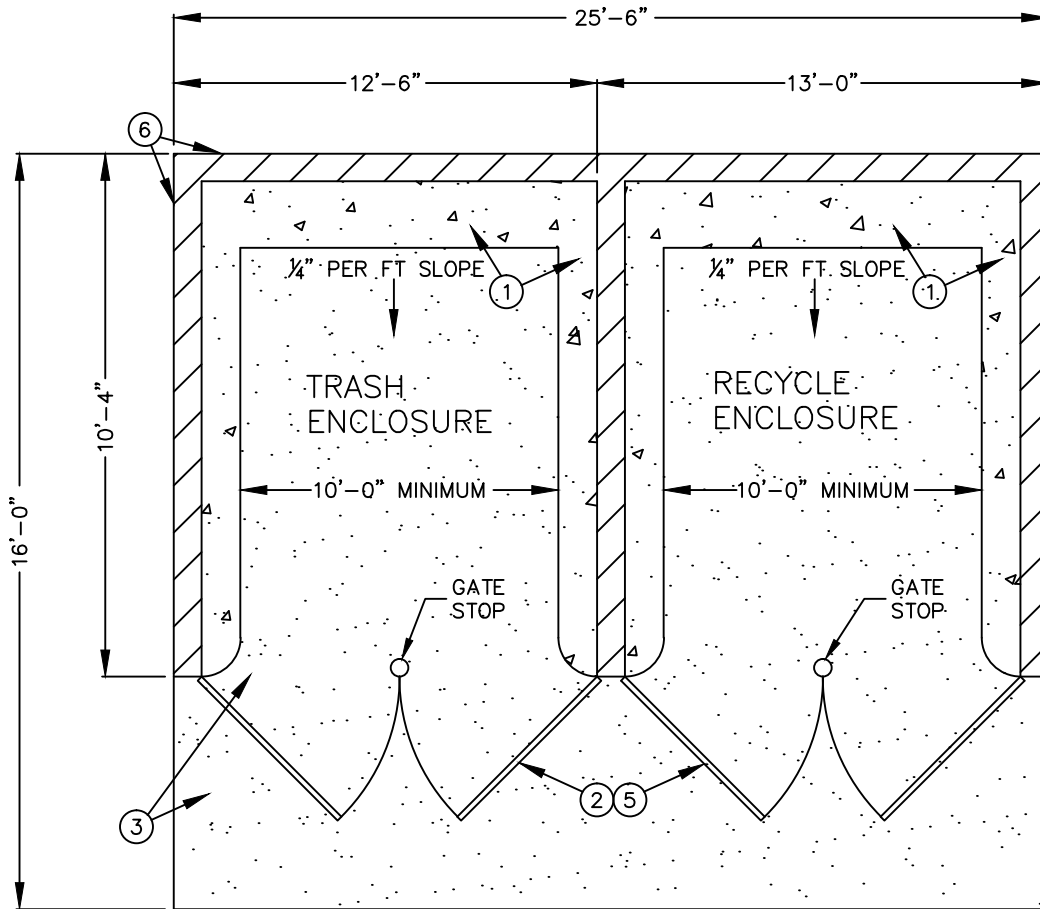

**NOTES:**

1. Provide 8" raised continuous concrete curbs 12" wide at side walls and 18" wide at rear walls to protect enclosure walls.
2. Gates shall be provided with a heavy gauge locking gate latch. Slide bolts are prohibited. Gates shall provide a minimum net opening of 7'-0".
3. Provide a minimum 4" thick, should drain 1/4 per ft to front concrete floor with no drainage path or incline in front of entrance.
4. Bin enclosure gates and service area shall not open into, or be a part of, a parking stall or loading zone.
5. Gates shall be provided with signage to clearly identify all solid waste collection and recycling areas.
6. Refuse and recyclable enclosures may be constructed of any material acceptable by the approving authority but shall provide full screening of refuse and recycling bins to a height of not less than 6'-0".
7. See sheet B-5B for structural section for trash enclosure.

Spec's By _____	<b>COUNTY OF MADERA</b>	Date: 05-16-02
Drawn By <u>J. SHIELDS</u>	<b>TRASH ENCLOSURE DOUBLE</b>	Scale: NONE
APPROVED BY _____		Drawing No. B-5A

REVISIONS	8/1/02	8/31/09	4/18/2011			
-----------	--------	---------	-----------	--	--	--