


Ⓢ E 1/4 27

Index File No. T-17 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. _____ Cor. No. _____
 T. 5S R. 23E R.D. MINARETS County MADERA
 S.D. MDM N.F. SIERRA State CALIFORNIA

CORNER DIAGRAM

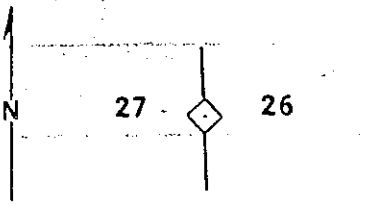

DESCRIBE CORNER MONUMENT FOUND

RECORD: Post 4' long, 4" Dia., in mound of rock 3' at the base and 2' high
 FOUND: Mound of rocks 2' at the base and 1/2' high
 Note; record taken from GLO notes of J. M. Anderson, 1881

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

RECORD: Fir 30" Dia., Bears N 52 E, 34 Links (22.4 Ft.)
 FOUND: NOTHING
 RECORD: Tamarack 15" Dia., Bears S 75 W, 31 Links (20.5 Ft.)
 FOUND: Tamatack 25" Dia., Bears S 68 W, 23 Ft.

PHOTO IDENTIFICATION DATA

Photo No. 5-76-172
 Filed At. S.O.
 Object Ident. Y.P. & Fir
 Ident. By Adrian Osham
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From Jones Store on Beasore Road, go North .5 miles to a fork and stay left. Go 4.7 miles to a cattle guard and continue another .4 miles to Road 5S15. Turn right on 5S15 and go .75 miles to a dirt road on the right. Take this road .25 miles to a K-Tag on a fir near the SW edge of a clearcut area. Walk 700' North across a thin meadow to the monument.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
Agency

Signature Adrian Osham Title Surveyor Division Cadastral Headquarters S.O. Date 7-6-81 FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Painted ring around the Bearing Tree and painted the monument.
 Flagged the area.

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

by direct of Howard Cohen Title L.S. Date 11-9-81 State Registration No. Ca. L.S. 4689
 or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS


Placed a location tag on a 53" Fir Bearing N 27 E from the corner a distance of 40'.
 C Tag on Tamarack reads "Dietrickson & Yusk"
 monument is 75' North of the thin long meadow and at the Western Edge of a clearcut area.

1/2 E 1/4 27

Index File No. T-17 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. _____
 T. 55 R. 23E R.D. Minerals County Madison
 Merid. Mt. Diablo N.F. Sierra State CA

Cor. 27/26 No. _____

CORNER DIAGRAM

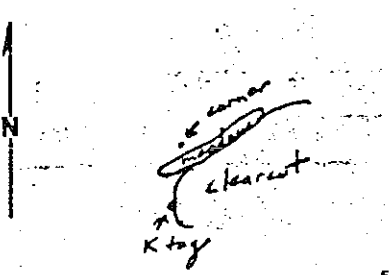

DESCRIBE CORNER MONUMENT FOUND
 Rock mound 2 1/2 rd x 1 ft high (half buried under duff)
 (Survey stake in mound)

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
 25" LP S70°W 341Ks (notes call for S75°W 311Ks) (old K tag)
 (smooth open face - no scribbling) facing corner
 44" RF N80°E 311Ks (notes call for N57°E 341Ks)
 (no evidence of blaze or scribbling)

PHOTO IDENTIFICATION DATA
 Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
 Corner is about 3 chains north of a stringer meadow.
 K tag placed on 56" RF below stump height 1/2 chain south of stock drive on west edge of clearcut. 10 1/2 chains north to corner.

PLANE COORDINATE POSITION DATA
 State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

Signature David A. Smith Title Assistant Division TM Headquarters North Fork Date 7-20-79 7100-52-(3,68)

T-17

CORNER RECORD (PERPETUATION)

2/2

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Painted mound red

ACCESSORIES : DESCRIBE NEW BT & WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Placed BT & Attention sign on LP BT Painted red band around tree
 Placed K tag & Attention sign on RF (Marked possible BT) Painted red band around tree

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
 Certified Cor. Record Prepared? Yes No Filed At _____ Date _____

REMARKS

E 1/4 27

Form 874-9—Revised May, 1918
U. S. Department of Agriculture
FOREST SERVICE

Indiana NATIONAL FOREST
CORNERS OF THE PUBLIC SURVEY

T. 55 R. 23 E M. 10 Mer.

Corner common to Sections 7, 26, and 27

Corner consists of a stone (not) in place
State condition flat - flat

Dimensions above ground 2 1/2 inches
Sketch grooves, letters, figures, or notches, on proper face or edge.

North	East	South	West

Mound of stone is located

Pits are located
Sketch markings of bearing trees (or rocks) in proper box and fill blanks below, giving bearings from corner to trees and distances in links.

Tree	Bearing	Distance

Species oak

Diameter 4 1/2

Bearing 100°

Distance 100

Do you believe this to be a genuine land office corner?

If not, why? It really is not

Dictyarchus John
Sweeney John
Signature
8/21/37 (Date) 15 (Title) Mer.

T. 55 R. 23 E M. 10 Mer.
(Make sketch of topography near corner)

Section 7	Section 26
Distance	Distance
Bearing	Bearing
Species	Species
Sec.	Sec.

Metal Location Poster is on a map on the NE side of tree 2 1/2 inches diameter, on the NE side of tree 2 1/2 inches diameter, on the NE side of tree 2 1/2 inches diameter.

from which this corner bears N 60° E

3 1/2 chains distant.

Give any further facts which will aid in finding this corner again.

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey

Corner is located on the NE corner of the public survey