


CORNER RECORD

COUNTY OF Madera T. 6 S R. 21 E M.D.B. & MERIDIAN CALIFORNIA

CORNER TYPE GOVT. CORNER MEANDER RANCHO CONTROL OTHER

CORNER IDENTIFICATION - DATE OF VISIT March 8 19 83



North 1/4 corner Section 25, 6/21.
(Common to Sections 24 and 25)

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND, EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found and Accepted: A 1" O.D., I.P., 30" long, up 6", tagged LS 2737, This monument is locally recognized and appears on many survey plats filed in Madera County Records, and is accepted as the best available evidence of the original corner position.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED

Remonumented with F.S.M., up 7". Placed found monument inverted in F.S.M. Built rock mound 2' at the base and 1' high around monument. Set metal post with a Forest Service K-tag and attention sign 3.5' north of monument.

F.S.M. - Aluminum monument, 2-1/2" O.D., 30" long with a 3-1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: MGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (7) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties

Cap Inscription

- 1) A bolt at the base of a water tank, painted red and tagged LS 4689, bears S 80° 28' 11" W; 173.12';
- 2) A forked Live Oak (2 forks), 21.0" dia., bears N 73° 16' W; 46.82'. Note: Bearing and diameter pertain to the previously blazed South Fork;
- 3) An incense cedar, 10.4" dia., bears N 39° 22' E; 48.41';
- 4) A Ponderosa Pine, 21.0" dia., bears S 51° 58' E; 11.64';


T 6 S R 21 E
 S 24
 1/4
 S 25
 LS 4689
 1983

Note: Distance is measured to an old nail and shiner, up 3' in the side-center of the tree.

- . A fence runs east and west, from the corner
- . Corner lies S 88° 25' 14" W, 2657.24' from NE corner of Section 25, 6/21.
- . Corner lies N 88° 22' 57" E, 2646.51' from NW corner of Section 25, 6/21.
- . Bearings are to the center of trees at base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.
- . Posted Forest Service Monument and Bearing Tree signs.

. Marked and scribed trees (trees 3 and 4) and stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions."

R-23
 2-34

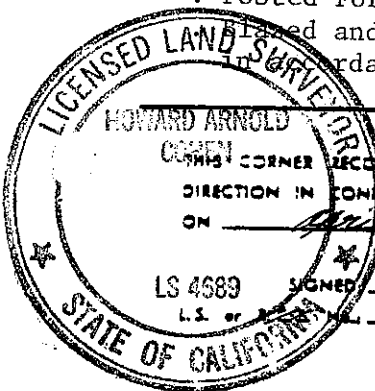

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON April 6 19 83
 SIGNED: Howard Arnold
 L.S. No. 4689

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19 _____ AND EXAMINED AND FILED _____ 19 _____ BY: Thomas A. Hansen
 TITLE: _____
 DOCUMENT No. _____
 STATEMENT ON BACK OF SHEET