

Index File No. _____


CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. _____

T _____ R. _____ R.D. _____ County _____

Merid. _____ N.F. _____ State _____

CORNER DIAGRAM

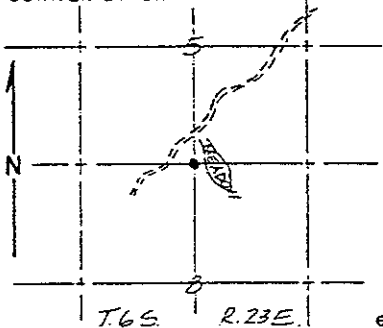

DESCRIBE CORNER MONUMENT FOUND

Found original set stone and scattered remains of rock mound.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Cut into a 36" fir (South 11° East, 38.05') to expose original scribing. Accepted heal in a 48" fir (South 80° East, 33.00') as other original BT without cutting open.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Turn east at Cold Springs Summit onto logging road, north at 1/4 mile, approximately 1 1/2 miles to small creek at meadow's end. Walk south along W/S meadow 500 feet. Walk west 115' to corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Replaced stone with U.S.F.S. monument in rock mound marked 1/4 corner Section 5 and Section 8, Township 6 South, Range 23 East.

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

I blazed a 16" fir South 50° East, 64.90' and a 24" fir North 52° West, 56.40'. I set a U.S.F.S. post North 45° East, 4.0'.

Work Done By Jones Title Surveyor Date _____ State Registration No. LS 4298 or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS