


W 1/4 Sec 5 Cor. 5 6125

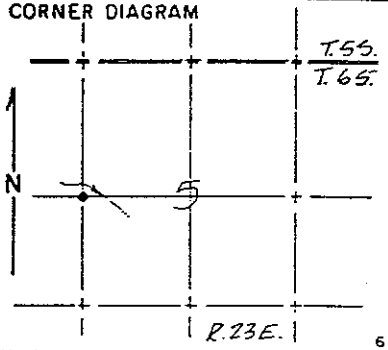

DESCRIBE CORNER MONUMENT FOUND

Found set stone and scattered remains of original rock mound.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Cut into a 36" y. pine, (North 73-3/4° East, 36.6') to expose scribing.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Go north on Beasore Road approximately 1 1/2 miles from Cold Springs Summit to old corral on W/S Road. Walk northwesterly into meadow and cross creek where two forks join. Continue in a northwesterly direction up the main drainage. The corner falls about 60 feet south of the creek.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a U.S.F.S. monument in a rock mound on a ledge at the base of a large solid rock bluff, marked 1/4 corner, Section 5 and Section 6, Township 6 South, Range 23 East.

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

I blazed a 40" s. pine North 32° West, 90.6', set a pk. nail and tag in the top of a large rock, North 22° West, 26.75' and set a U.S.F.S. post South 45° West, 4.0'.

Work Done By. JOnes Title Surveyor Date _____ State Registration No. LS 4298
 or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS