


CORNER RECORD

COUNTY OF Madera T. 6 S. R. 24 E. M.D.B. & M. MERIDIAN CALIFORNIA

CORNER TYPE: GOV'T. CORNER MEANDER RANCHO CONTROL OTHER

CORNER IDENTIFICATION — DATE OF VISIT October 24 19 85



The northwest corner of section 8 6/24.

CORNER — LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Corner position falls in a creek bank that will soon wash out. Found a F.S.M., (LS 4727) stamped for a witness corner, lying horizontally on the ground. Reestablished witness corner position from found corner ties. Reestablished corner position at record bearing and distance from witness corner position per R/S 27/103 M.C.O.R. Found 1 possible original bearing trees per GLO field notes of J.M. Anderson U.S. Deputy Surveyor 1881.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

Set 2 Reference Monuments for the corner each consisting of a F.S.M..
 R.M. # 1, up 8", in a 1 1/2' dia., 5" high rock mound.
 R.M. # 2, up 6", in a 1 1/2' dia., 6" high rock mound. Set a metal post with Forest Service monument signs attached, 4' ± S 85° W and N 20° W respectively.
 F.S.M. — Aluminum monument, 2 1/2" O.D., 30" long with a 3 1/4" O.D. aluminum cap stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties:

Original Bearing Trees:

- . A Yellow Pine, 4.1' dia., bears N 63° 35' W, 73.5'.
(No Nail)
A 1948 K-tag identifies this tree as an original BT.

Cap Inscription


T	6	S	R	24	E
S	6		S	5	
S	7		S	8	
LS 4689					
1985					

New Bearing Objects:

- . A Ponderosa Pine, 14" dia., bears S 37° 39' E, 80.46'.
- . Reference Mon. #1, bears S 85° 00' 00" W, 25.00'.
- . Reference Mon. #2, bears N 20° 00' 00" W, 25.00'.

E-5
 F.B. 35/65
 Job No. 85-19
 (Continued on back)

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS REPAIRED BY HOWARD ARNOLD
 DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT
 ON Jan 2 19 86
 SIGNED: Howard Arnold Cohen
 L.S. No. Ca. 704 4689
 LS 4689

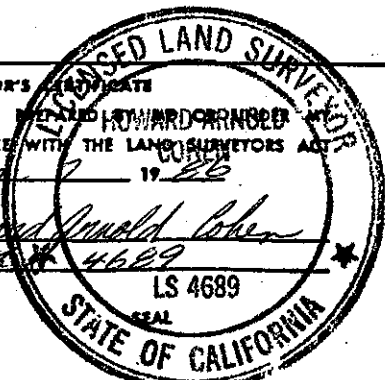

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19____
 AND EXAMINED AND FILED _____ 19____
 BY: Howard Arnold Cohen
 TITLE: _____

DOCUMENT No. _____
 STATEMENT ON BACK OF SHEET
 YES NO

Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.

Posted Forest Service monument and bearing tree signs.

Stamped monuments in accordance with the BLM 1973 "Manual of Surveying Instructions".

0624202600C

