


CORNER RECORD TIE

SECTION 29 ; TOWNSHIP 8 SOUTH; RANGE 20 EAST, M.D.B. & M.

NAME OF CORNER	DESCRIPTION OF CORNER	TIES		
		DESCRIPTION	DISTANCE	DIRECTION
SE Cor.	1/2" I.P. W/TA6 RCE 12,406	—	—	—
S 1/4 Cor.	1" I.P. W/TA6 RCE 21650	30" WHITE OAK (BLAZED)	37.6'	S 74° E
W 1/4 Cor.	1" I.P. W/TA6 RCE 21650 IN ROCK MND.	24" WHITE OAK 16" WHITE OAK	50.5' 50.0'	N 86° W N 51° E
N 1/4 Cor.	1" I.P. W/TA6 RCE 21650 IN ROCK MND.	30" WHITE OAK 20" WHITE OAK	34.0' 29.0'	N 6° W S 63° E
NE Cor.	1 1/2" I.P. W/TA6 RCE 21650 IN ROCK MND.	FENCE BEARS N.E'S FENCE BEARS E 6' N	126.0' 25.0'	WEST NORTH
E 1/4 Cor.	1" I.P. W/TA6 RCE 21650	CO. ROAD 400 BEAR N 12° E WOOD CORRAL	20.0' 125.0'	WEST S 60° W

SURVEYOR'S CERTIFICATE

This corner record tie was prepared by me or under my direction in conformance with the requirements of the Land Surveyor's Act in MARCH, 1974.  
(Date)

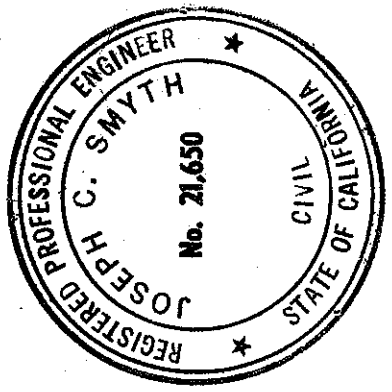

*Joseph C. Smyth*  
Signature and Seal

0820302200

Handwritten scribbles and marks at the top of the page.

Handwritten scribbles and marks in the upper middle section.

