

CORNER RECORD (SEARCH)  
(Ref. FSM 7151.4)

Tract or Survey No. \_\_\_\_\_

Cor. No. E<sup>1</sup>/<sub>4</sub> Sec. 1

(30)

Index File No. \_\_\_\_\_


T 8S R. 22E

R.D. Minerats County Madera

Merid. M.D.B. & M.

N.F. Sierra State CA

44/43-49

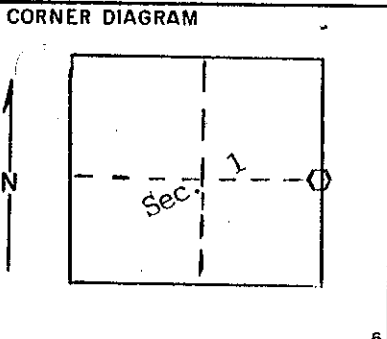

DESCRIBE CORNER MONUMENT FOUND

Found 2" diameter Iron Pipe with Tag LS 2737, in a rock mound. Accepted as being set by proper methods. *Found no evidence of original GLO monument.*

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

no other evidence found.

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_

Filed At. \_\_\_\_\_

Object Ident. \_\_\_\_\_

Ident. By \_\_\_\_\_

*Signature*

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From Madera County Road 274 and Willow Creek Road, thence easterly along Willow Creek Road for approximately 850' to a power line, thence southerly along power line for approximately 200' to the corner.

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_

X \_\_\_\_\_

Y \_\_\_\_\_

Estab. By \_\_\_\_\_

*Agency*

Signature *[Signature]* Title LS5339 Division \_\_\_\_\_ Headquarters \_\_\_\_\_ Date 2/17/95 7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a standard USFS aluminum monument  
 2 1/2" O.D. X 30" long with a 3 1/2" diameter  
 cap. Re-built rock mound and left  
 Iron Pipe alongside.

CAP MARKED:

T8S  
 R22E R23E  
 1/4  
 S1 | S6  
 LS 5339  
 1995

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

1. An 8" diameter Live Oak, blazed and scribed "NBT" bears N47°46'W, 41.50'.
2. A 13" diameter Ponderosa Pine, blazed and scribed "NBT" bears N20°25'W, 36.37'.
3. A 6" diameter Live Oak, blazed and scribed "NBT" bears N32°12'E, 54.48'.
4. Set a metal post with USFS signs, S45°E, 4'.

Work Done By R. Seaman Title L.S. Date 2/8/95 State Registration No. or Agency 5339

Certified Cor. Record Prepared? Yes  No  Filed At: \_\_\_\_\_ Date \_\_\_\_\_

REMARKS

Bearings are to the center of the trees, distances are horizontal to a nail and tag LS 5339 driven into the side-center of the root crown. Posted USFS monument and bearing tree signs as required.