


CORNER RECORD

COUNTY OF Madera T. 8 S R. 23 E M.D.B. & MERIDIAN CALIFORNIA
 CORNER TYPE: GOV'T. CORNER MEANDER RANCHO CONTROL OTHER
 CORNER IDENTIFICATION - DATE OF VISIT December 16, 1982



Northwest Corner section 17 8/23.
 (common to sections 7, 8, 17, & 18)

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER REBUILT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH
Found and Accepted: A 2 1/4" O.D., galv. pipe, 30" long, up 6", tagged LS 4509, per parcel map No. 1812 M.C.O.R. This is a locally used corner and is accepted as the best available evidence of the original corner position.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED
 Remonumented with standard F.S.M., flush. Buried found pipe inverted, 6" down on west side of F.S.M. Set metal post with a Forest Service K-tag and monument sign 3 1/2' SE of corner.
 F.S.M. - Aluminum monument, 2-1/2" O.D., 30" long with a 3-1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties


Cap Inscription

- | | |
|--|-----------------|
| 1. A Digger Pine, 11.9" dia., bears N 33° 08' W; 80.07' | T 8 S R 23 E |
| 2. A Digger Pine, 5.2" dia., bears S 19° 06' W; 53.04' | S 7 S 8 |
| 3. A Digger Pine, 29.5" dia., bears S 69° 18' W; 99.41' | S 18 S 17 |
| 4. A Forked Live Oak, 8.4" dia., previously blazed 4' high with a nail and tag (LS 4509) in blaze, bears N 49° 35' W; 77.34' | LS 4689 1982 |

Note: Diameter and bearing pertain to blazed fork.

- . Corner is N 0° 16' 58" W; 2620.65' from west 1/4 corner S.17 8/23.
- . Bearings are magnetic; declination 16 1/2° E.
- . Bearing are to the center of trees at base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown.
- . Posted Forest Service Monument and Bearing Tree signs.
- . Blazed and scribed trees No. 2 and 4; stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions."

J-5
2-28

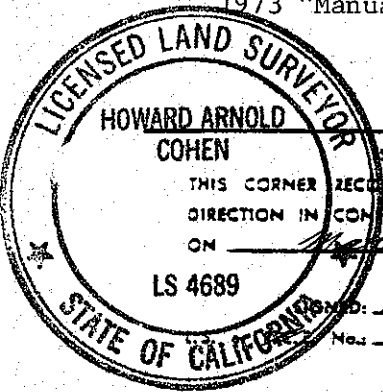

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON Dec 21 1982
 SIGNED: Howard Cohen
 No. 4689

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19____ AND EXAMINED AND FILED _____ 19____
 BY: Howard A. Hansen
 TITLE: _____
 DOCUMENT No. _____
 STATEMENT ON BACK OF SHEET