CORNER RECORD

CORNER TYPE: GOVT. CORNER ☒ MEANDER ☐ RANCHO ☐ CONTROL ☐ OTHER ☐
CORNER IDENTIFICATION — DATE OF VISIT __October 2, 19 85__

```
 _____
|    |      |
|-2-|-3----|
|    |      |
 _____
```

The northwest corner of section 23 5/23.

CORNER — LEFT AS FOUND ☐ FOUND AND TAGGED ☐ REESTABLISHED OBLITERATED CORNER ☐ REBUILT ☒

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

__Found and Accepted:__ A 3 1/2" x 3 1/2" hand hewn pine post in a 3' diameter rock mound. Found 2 original bearing trees per GLO field notes of J. M. Anderson U.S. Deputy Surveyor 1881.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

Remonumented with F.S.M., up 7". Rebuilt rock mound 3' dia. x 7" high around monument. Set a metal post with Forest Service monument signs attached 4' ± NE of the corner. Placed found post alongside of F.S.M..

F.S.M. - Aluminum monument, 2 1/2" O.D., 30"-long with a 3 1/4" O.D. aluminum cap stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST ☐ SECOND ☐ THIRD ☐
STATIONS USED: NGS (USC & GS) ☐ STATE ☐ COUNTY ☐ OTHER ☐ STATION _____ STATION _____
ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties:

Original Bearing Trees:

1. A Fallen Pine, bears S $66°$ 46' W, 76.3'.
   (No Nail)

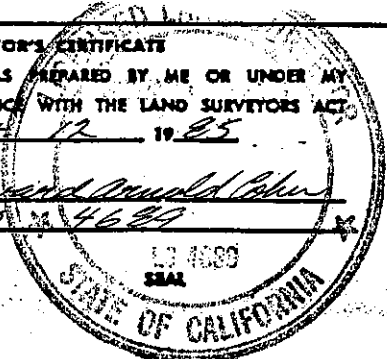2. A Pondrerosa Pine, 61.4" dia., bears N $77°$ 25' W, 41.98'.

New Bearing Trees:

3. A White Fir, 29" dia., bears N $4°$ 00' W, 33.85'.

4. A White Fir, 5.5" dia., bears S $72°$ 05' E, 13.23'.

5. A Forked White Fir, 16" dia., bears S $1°$ 58' E, 38.54'.
   (Bearing, distance, and diameter pertain to W'ly fork)

6. A White Fir, 18" dia., bears N $65°$ 55' W, 21.67'.

Cap Inscription

```
   T 5 S   R 23 E
S 15  |  S 14
S 22  |  S 23
     LS 4689
       1985
```

N-17
F.B. 35/59
Job No. 85-17
(Continued on back)

Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.

Posted Forest Service monument and bearing tree signs.

Stamped monument in accordance with the BLM 1973 " Manual of Surveying Instructions".

0523500400