


CORNER RECORD

COUNTY OF Madera T. 8 S R. 23 E M.D.B. & MERIDIAN CALIFORNIA

CORNER TYPE: GOVT. CORNER MEANDER RANCHO CONTROL OTHER

CORNER IDENTIFICATION — DATE OF VISIT December 13 1984



Northwest corner of Section 30, T 8S. R 23 E.
Common to Sections 24 & 25 8/22 and Section 19 & 30 8/23.

CORNER — LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND, EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found and Accepted: A 1 1/2" O.D.I.P., up 3" tagged LS 4509. Found 1 possible bearing tree per GLO field notes of Archibald McNeill, U.S. Deputy Surveyor, 1858. This monument is locally recognized and appears on many survey plats filed in the Madera County Records. It is accepted as the best available evidence of the original corner position.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED

Remonumented with F.S.M., up 6". Built a rock mound 2 1/2'x2'x1' high around monument. Placed found monument inside of F.S.M. Set a metal post with a Forest Service monument sign attached 4' + SW of the corner.

F.S.M. - Aluminum monument, 2 1/2" O.D., 30" long with a 3 1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties:

Original Bearing Tree (possible):

1. A White Oak, 24.7" dia., bears N 42° 56'W, 15.0'. (No Nail)

New Bearing Objects:

2. A White Oak, 7.0" dia. bears N 48° 06'E, 37.61'.
3. A White Oak, 12.0" dia., bears S 69° 24'E, 26.79'.
4. A black Oak, 14.0" dia. bears S 41° 14'W, 112.61'.
5. A Chiseled '+' on top of E'ly Wall of concrete flume bears N 83° 01' 12" W, 182.52'.
6. A White Oak, 12.7" dia. bears N 36° 34' W, 37.15'.
 - . Corner lies S 77° W, 83.7' from the center of a dirt road running N 4° W & S 15° E.
 - . Corner lies 6 1/2' East of a 4-Wire fence running N'ly & S'ly.
 - . Corner lies S 20° 40' W, 52.0' from a fence corner (fences run S'ly & E'ly from fence corner).

Cap Inscription

T 8S
R 22E R 23E
S 24 S 19
S 25 S 30
LS 4689
1984

Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag(stamped LS 4689) driven into the center of the root crown, unless otherwise noted.

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS RECEIVED BY HOWARD ARNOLD COUNTY SURVEYOR

DIRECTION IN CONFORMANCE WITH THE CONSTITUTION ACT ON May 28 1985

SIGNED: Howard Arnold

L.S. 4689 No. 4689

STATE OF CALIFORNIA

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 12/13 1984


AND EXAMINED AND FILED 12/13 1984

BY: [Signature]

TITLE: _____

DOCUMENT No. _____

STATEMENT ON BACK OF SHEET YES NO

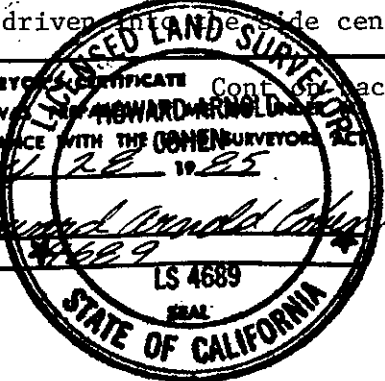

Posted Forest Service Monument and Bearing Tree signs on trees #1, #2, #3.

Stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions".

R-1

F.B. 30/64

Job No. 84-13

0823 102300

