
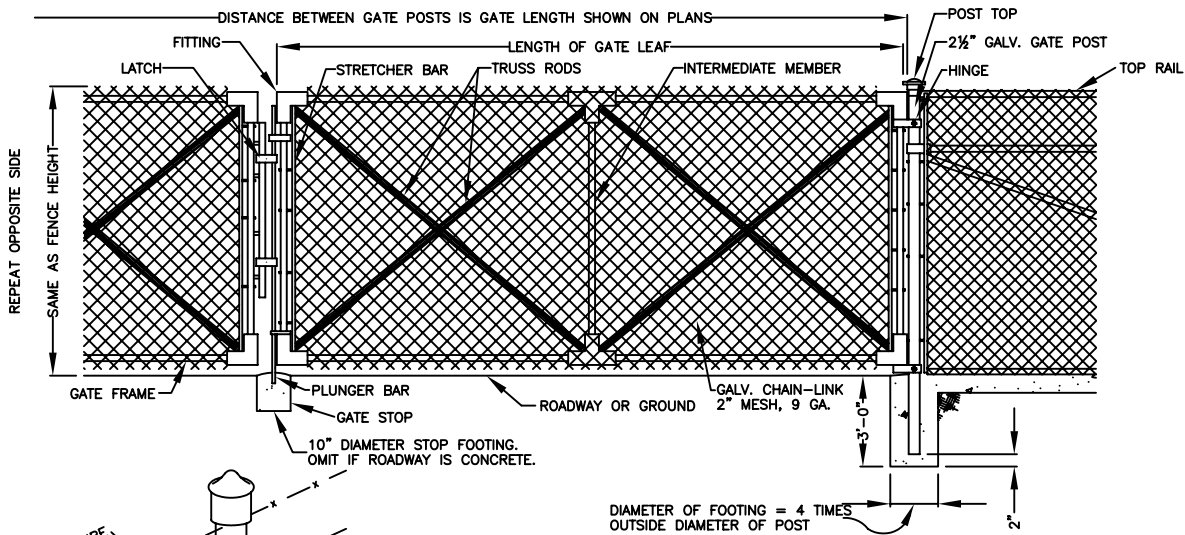


FENCE

NOTES:

1. DEPTH OF FOOTINGS ARE INTO NATURAL UNDISTURBED SOIL OR TESTED AND APPROVED COMPACTED FILL.
2. FOOTING CONCRETE SHALL BE A MINIMUM 2000 PSI AT 28 DAYS.
3. THE FOLLOWING ITEMS SHALL BE REQUIRED ON ALL INSTALLATIONS:
 - A. TOP HORIZONTAL RAIL (1 1/2")
 - B. BARBED WIRE
 - C. EXTENSION ARM
4. 9 GA. WIRE FASTENERS SHALL BE USED.
5. 9 GA. WIRE TO BE USED AROUND HIGH DANGER ENCLOSURES SUBJECT TO COUNTY ENGINEER DISCRETION; (OTHER AREAS 11 GA. ACCEPTABLE)

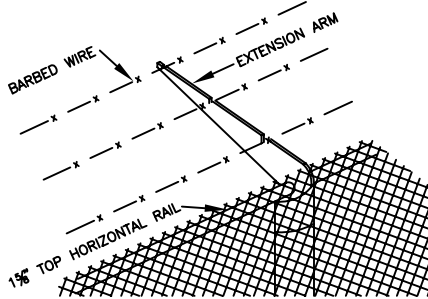

GATE

NOTES:

1. SAME AS NOTE 1 ABOVE.
2. SAME AS NOTE 2 ABOVE.
3. THE FOLLOWING ITEMS SHALL BE FURNISHED AND INSTALLED ONLY WHEN SHOWN ON PLANS AND/OR CALLED FOR IN THE SPECIAL PROVISIONS:
 - A. BARBED WIRE
 - B. EXTENSION POST
4. 12 GA. WIRE FASTENERS SHALL BE USED.

Spec's By _____
 Drawn By J. SHIELDS
 APPROVED BY _____
 COUNTY ENGINEER

COUNTY OF MADERA

CHAIN-LINK FENCE DETAILS

Date 7-1-81
 Scale NONE
 Drawing No. B-6

REVISIONS	8/1/02						
-----------	--------	--	--	--	--	--	--