

CORNER RECORD

COUNTY OF Madera T. 5 S. R. 23 E. M.D.B. & M. MERIDIAN CALIFORNIA
 CORNER TYPE: GOVT. CORNER MEANDER RANCHO CONTROL OTHER
 CORNER IDENTIFICATION - DATE OF VISIT August 12 1985



The west 1/4 corner of section 27 5/23.

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH
Found and Accepted: A 3' dia. rock mound and the remains of 2 original bearing trees per GLO field notes of J. M. Anderson U.S. Deputy Surveyor 1881.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED
 Remonumented rock mound with F.S.M., up 3". Rebuilt rock mound 3' dia. by 1/2' high around monument. Set a metal post with Forest Service monument signs attached 4' ± SW of the corner.

F.S.M. - Aluminum monument, 2 1/2" O.D., 30" long with a 3 1/4" O.D. aluminum cap stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties:

Original Bearing Trees:

1. A stump hole, bears S 53° 30' W, 23.5'. (No Nail)
2. A Tamarack snag, 20" dia. with visible scribing, bears N 40° 16' E, 11.9'. (No Nail)

New Bearing Objects:

3. A Fir, 15.5" dia., bears N 38° 32' E, 14.01'.
4. A Tamarack, 18.9" dia., bears S 72° 55' E, 55.02'.
5. A Fir, 8.8" dia., bears S 48° 38' W, 61.15'.
6. A Fir, 20.4" dia., bears N 41° 15' W, 61.66'.


Cap Inscription

T 5 S R 23 E
 1/4
 S 28. S 27
 LS 4689
 1985

T-13
 F.B. 34/71
 Job No. 85-9

(Continued on back)

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS PREPARED BY HOWARD ARNOLD UNDER
 DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT
 ON October 9 1985
 SIGNED: Howard Arnold
 L.S. No. 4689 LS 4689

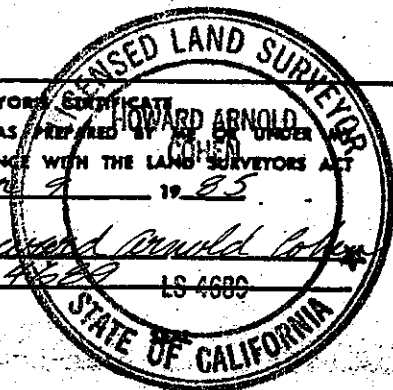

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED 10/31 1985
 AND EXAMINED AND SIGNED 11-18-85
 BY Howard Arnold
 TITLE: _____

DOCUMENT No. _____

STATEMENT ON BACK OF SHEET

YES NO

Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.

Posted Forest Service monument and bearing tree signs.

Stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions".

0523 400240

