

Index File No. \_\_\_\_\_

CORNER RECORD (SEARCH)  
(Ref. FSM 7151.4)

Tract or Survey No. \_\_\_\_\_

13

Cor. No. S1/4 Sec 1


T 6S R. 20E

R.D. \_\_\_\_\_ County Mariposa

Merid. M.D.B. 97M

N.F. Sissa State CA

CORNER DIAGRAM

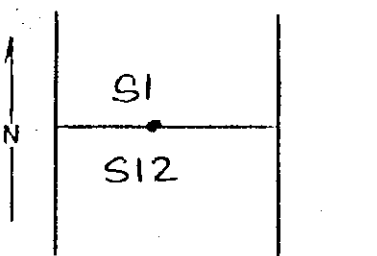

DESCRIBE CORNER MONUMENT FOUND

Found 1" IP in rock mound stamped LS 2937. Accepted as perpetuation of original corner, per Record of Survey Map No. 1183.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1. Found 28" diameter black oak with scar on face bears S09°20'E 25.81' (S10'E 25.08' per GLO and Record of Survey 1183) Accepted as original tree.

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_  
Filed At \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
Signature \_\_\_\_\_

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Follow Highway 49 southerly from Harris Road 600'± to S. Pine section 1. Thence westerly 1100'± to corner. Monument is 30'± west of drainage.

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
Agency \_\_\_\_\_

Signature: [Signature] Title: LS 5339 Division: \_\_\_\_\_ Headquarters: \_\_\_\_\_ Date: 10/25/90 FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a standard USFS aluminum monument 2 1/2" O.D. x 30" long with a 3 1/2" diameter cap, left I.P. alongside. Marked:

T6S R20E

1/4 S1  
S12

LS5339 1990.

ACCESSORIES : DESCRIBE NEW BTH WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

1. A 6" live oak blazed and scribed "NBT" bears N76°10'E 47.24'  
2. A 7" live oak blazed and scribed "NBT" bears S52°41'E 12.08'  
Set a metal post with 54-5 and 54-9 signs S45°E 4' from monument.

Work Done By: R. Seaman Title: LS Date: 10/18/90 State Registration No. 5339 or Agency \_\_\_\_\_

Certified Cor. Record Prepared? Yes  No  Filed At: \_\_\_\_\_ Date: \_\_\_\_\_

REMARKS

Bearings are to the center of trees, distances are horizontal to a nail and tag LS5339 driven into the side center of the root crown. Posted USFS 54-3 and 54-9 signs on all trees.

File No. T. R. M. Tract or Surv. No. Cor. 18