

Index File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____

57

Cor. No. S/4 Sec. 12

T 65 R 20E

R.D. _____


County Mariposa

Merid. NDB 5' N

N.F. Susser

State CA

CORNER DIAGRAM

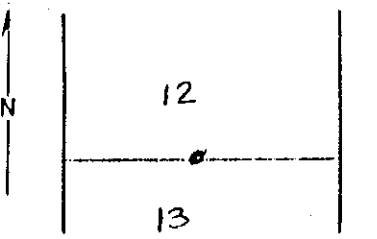

DESCRIBE CORNER MONUMENT FOUND

Found 1" I.P. buried in field. Position fits that shown on Record of Survey No. 1183 relative to other monuments. Accepted as perpetuation of original GLO corner. Subsequent to location and survey of pipe it was ~~washed up by persons workmen.~~

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Nothing found per GLO
Nothing found per corner records of records.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At _____
Object Ident. _____
Ident. By _____
Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From Highway 49 at the Mariposa - Madera Co. Line, take USFS Road 6379 approximately 1300' westerly to posting line. Follow posting line approximately 300' west to corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

Signature _____

Title LS 5339

Division _____

Headquarters _____

Date _____

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set standard USFS Aluminum monument in original position where I.P. was found, 2 1/2" O.D. x 30" long with 3 1/2" diameter cap in a rock mound.

T65 R20E
Marked: $74 \frac{512}{513}$
LS 5339 1990

ACCESSORIES: DESCRIBE NEW B.T. WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

1. A 10" pine blazed and scribed "NBT" bears N15°33'E 17.99'
2. A 16" pine blazed and scribed "NBT" bears N28°41'E 71.15'
3. A 14" pine blazed and scribed "NBT" bears N70°00'E 60.63'
4. Set a metal post with 54-5 and 54-9 signs N45°W 4' from monument

Work Done By R. Seaman

Title LS

Date 1/15/90

State Registration No. 5339
or Agency _____

Certified Cor. Record Prepared? Yes No

Filed At _____

Date _____

REMARKS

Bearings are to the center of trees, distances are horizontal to a nail and tag LS 5339 driven into the side center of the root crown. Posted USFS 54-3 and 54-9 signs on all trees.

Index File No. _____

T. _____

R. _____

M. _____

Tract or Surv. No. _____

Cor. _____