



CORNER RECORD

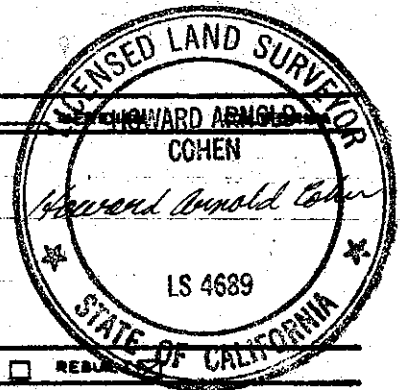

COUNTY OF Madera T. 6S R. 24E M.D.B. &
 CORNER TYPE: GOV'T. CORNER MEANDER BENCH CONTROL OTHER
 CORNER IDENTIFICATION - DATE OF VISIT September 13 1982



Northwest corner section 16 6/24.

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER REBUILT

PHYSICAL DESCRIPTION OF CORNER FOUND, EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH
 FOUND & ACCEPTED: A 7/8" O.D., I.P., no tag. 30" long, flush in rock mound, 2' at the base and 1/2' high. Accepted as best available evidence of original corner position. See map of tract No. 167 in book 15 of maps pp. 175-179, M.C.O.R. found one original bearing tree.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED
 SET: Standard F.S.M., up 7". Rebuilt rock mound, 2' at the base and 1/2' high around monument. Drove found monument flush on north side of F.S.M. Set a fiberglass post 4' ± NE of the monument with a Forest Service monument sign attached.

F.S.M.: Aluminum monument, 2 1/2" O.D., 30" long with a 3 1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (N) _____ EASTINGS (E) _____

SKETCH (include reference to or witness points, remarks and topo of area)

CORNER TIES

CAP INSCRIPTION

- Original Bearing Trees
 A Ponderosa Pine stump, 16.1" dia., bears S 15° 12' W, 17.7"
 (Scribing visible, no nail)
Other Bearing Objects
 A Ponderosa Pine, 11.4" dia., bears N 13° 17' E, 57.87'
 An Incense Cedar, 26.6" dia., bears N 86° 53' E, 35.53'
 A Ponderosa Pine, 25.6" dia., bears S 39° 15' E, 48.90'
 A Sugar Pine, 34.1" dia., bears S 26° 28' W, 64.04'
 A P.K. nail and tag (LS 4689), bears N 10° 36' 42" E, 93.06'
 A Black Oak, 14.5" dia., bears N 45° 24' W, 49.0' (Possible original B.T., no nail)
 A Ponderosa Pine snag, 27.5" dia., bears N 66° 11' E, 17.3"
 (Possible original B.T., no nail)
 A Ponderosa Pine, 33.7" dia., bears S 20° 29' E, 19.8'
 (Possible original B.T., no nail)

T 6 S R 24 E
 S8 | S9
 S17 | S16
 LS 4689
 1982

- Bearings are to the center of trees at base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side-center of the root crown, unless otherwise noted.
- Posted Forest Service Monument and Bearing Tree signs.
- Blazed and scribed trees and stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions".

* Fence lines run north and west from corner.

J-9
2-4

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYOR'S ACT ON Nov 10 1982
 SIGNED Howard Arnold Cohen
 L.S. No. 4689

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED AND EXAMINED AND IS TRUE TO THE ORIGINAL RECORD BY Thomas C. Harrison
 COUNTY SURVEYOR
 DOCUMENT NO. _____
 STATEMENT ON BACK OF SHEET