



# CORNER RECORD

COUNTY OF Madera T. 7 S R. 22 E M.D.B. &           

CORNER TYPE: GOV'T. CORNER  MEANDER  RANCHO  CONTROL  OTHER

CORNER IDENTIFICATION - DATE OF VISIT July 21 19 82

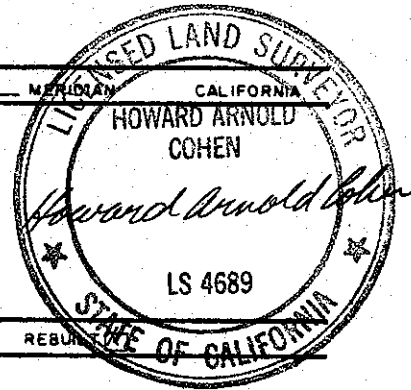

West  $\frac{1}{4}$  corner Section 22 7/22.

CORNER - LEFT AS FOUND  FOUND AND TAGGED  REESTABLISHED OBLITERATED CORNER  REBUILT

**PHYSICAL DESCRIPTION OF CORNER FOUND, EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH**

RECORD: A post, 4" dia., 2' in earth, 2' above, per GLO notes of W. F. Benson, U.S. Surveyor 1878.

FOUND & : A 1" O.D., I.P., 29 $\frac{1}{2}$ " long, up 10" tagged L.S. 2854, perpetuating the original ACCEPTED corner position per parcel map No. 1159 filed with the Madera County Surveyor.

Found 2 original bearing trees

**PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED**

SET: Standard FSM, up 8". Built a rock mound 2'x1 $\frac{1}{2}$ 'x1' high around the monument. Placed old monument upside-down in FSM. Set a fiberglass post 4' + S of the monument with a Forest Service Attention sign attached.

FSM - Aluminum monument, 2 $\frac{1}{2}$ " O.D., 30" long with a 3 $\frac{1}{4}$ " O.D. aluminum cap; stamped for the corner, with L.S. 4689, the date, and a Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER FIRST  SECOND  THIRD   
 STATIONS USED: NGS (USC & GS)  STATE  COUNTY  OTHER  STATION             
 ZONE            ELEVATION            NORTHINGS (Y)            EASTINGS (X)           

KETCH: (Include reference tie or witness points, remarks and topo of area)

**CORNER TIES:**

**CAP INSCRIPTION**

Original Bearing Trees

An incense cedar stump, 32.4" dia., bears N 6° 13' E, 37.4'.  
(No Nail)

A black oak, 18.8" dia., (N. fork), bears S 59° 20' W, 14.19'.

T7S R22E  
 $\frac{1}{4}$   
 S21! S22  
 L.S! 4689  
 1982

Other Bearing Trees

A black oak, 11.3" dia., bears N 70° 45' E, 45.22'.

An incense cedar, 15.1" dia., bears S 29° 07' W, 46.91'.

A ponderosa pine, 8.7" dia., bears N 15° 20' W, 30.48'.

- . Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped L.S. 4689) driven into the side-center of the root crown, unless otherwise noted.
- . Posted Forest Service monument and bearing tree signs.
- . Blazed and scribed ~~new bearing trees~~ and stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions".

P-13  
1-71

**SURVEYOR'S CERTIFICATE**

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYOR'S ACT ON October 18 19 82

SIGNED: Howard Arnold Cohen

L.S. or P.C.E. No. 4689

**COUNTY SURVEYOR'S CERTIFICATE**

THE CORNER RECORD WAS RECEIVED            19            AND EXAMINED AND FILED           

BY: [Signature]  
TITLE County Surveyor

DOCUMENT No.           

STATEMENT ON BACK OF SHEET