


CORNER RECORD

COUNTY OF Madera T. 8 S. R. 21 E. M.D.B. & M. MERIDIAN CALIFORNIA

CORNER TYPE GOVT. CORNER  MEANDER  RANCHO  CONTROL  OTHER

CORNER IDENTIFICATION - DATE OF VISIT November 29 1983



The north 1/4 corner of section 1 8/21.  
(common to section 36 7/21 and section 1 8/21)

CORNER - LEFT AS FOUND  FOUND AND TAGGED  REESTABLISHED OBLITERATED CORNER  RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH  
Found and Accepted: A Black Oak, 20.4" dia., for the corner per field notes of Archibald McNeill, U.S. Deputy Surveyor, 1858.  
Tree has 3 healed notches on both the east and west sides.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED  
Set 2 Reference Monuments to the corner. Refer to Corner Ties # 1 and 2.  
Reference Monuments are F.S.M.'s., up 5", no rock mounds.  
Set a metal post with Forest Service monument signs attached, 4' ± N of the corner tree.  
F.S.M. - Aluminum monument, 2 1/2" O.D., 30" long with a 3 1/4" O.D. aluminum cap stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST  SECOND  THIRD   
STATIONS USED: NGS (USC & GS)  STATE  COUNTY  OTHER  STATION \_\_\_\_\_ STATION \_\_\_\_\_  
ZONE \_\_\_\_\_ ELEVATION \_\_\_\_\_ NORTHINGS (Y) \_\_\_\_\_ EASTINGS (X) \_\_\_\_\_

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Cap Inscription

Reference Monument #1

25.00 FT  
1/4 S 1 RM  
LS 4689  
1983

Reference Monument #2


25.00 FT  
1/4 S 1 RM  
LS 4689  
1983

Corner Ties (from Corner Tree):

- 1. Reference Monument #1, bears S 45° 00' 00" W, 25.00'.  
Set metal post with Forest Service monument signs attached, 4' ± SW of the Reference Monument.
- 2. Reference Monument #2, bears S 45° 00' 00" E, 25.00'.  
Set metal post with Forest Service monument signs attached, 4' ± SE of the Reference Monument.

A-23  
F.B. 19/36  
Mon. Bk. 2/77  
Job No. 83-20  
(Continued on back)

SURVEYOR'S CERTIFICATE  
THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYOR ACT ON \_\_\_\_\_ COHEM \_\_\_\_\_  
SIGNED: Howard Arnold  
L.S. No. 4689

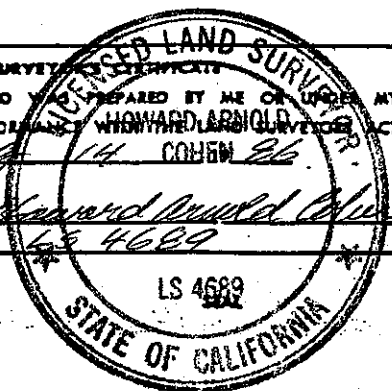

COUNTY SURVEYOR'S CERTIFICATE  
THE CORNER RECORD WAS RECEIVED 10/17/86 BY \_\_\_\_\_ AND EXAMINED AND FILED 11/17/86 BY: Thomas H. Anderson  
TITLE: \_\_\_\_\_

DOCUMENT No. \_\_\_\_\_  
STATEMENT ON BACK OF SHEET YES  NO

3. A Black Oak, 27.9" dia., bears S 62° 46' E, 16.70'.
4. An Incense Cedar, 16.4" dia., bears S 21° 33' W. 18.49'. (healed blaze)
5. An Incense Cedar, 15.0" dia., bears N 06° 57' E, 73.44'.

Found a 1" O.D. iron pipe, tagged LS 2737, up 9", bears S 77° 50' 54" E, 2.21'. This monument was established as a Witness Corner per Record of Survey filed in Book 11 of Maps at page 27 M.C.O.R.

Found a 3/4" O.D. iron pipe, untagged, up 18", bears N 01° 00' 09" E, 79.93'.

The centerline of a dirt road lies N 15° W, 21' ± from the corner.

Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown.

Posted Forest Service monument and Bearing Tree signs on the corner tree and bearing trees #3 and #4.

Blazed and scribed bearing tree #3 and stamped reference monuments in accordance with the BLM 1973 "Manual of Surveying Instructions".

0821640700

