


CORNER RECORD

COUNTY OF Madera T. 8 S R. 22 & 23 E M. D. R. & MERIDIAN CALIFORNIA

CORNER TYPE: GOVT. CORNER MEANDER RANCHO CONTROL OTHER
 CORNER IDENTIFICATION - DATE OF VISIT December 2, 1982



Northwest corner section 18 8/23
 (common to sections 7 & 18 8/23 and 12 & 13 8/22)

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER REBUILT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found and Accepted: A 2 1/2" O.D., I.P., up 8", with a brass cap stamped for the corner with the BLM logo, per BLM dependent resurvey by Dale T. Bedell, Cadastral surveyor 1974. Found 2 BT's.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

Left monument as found. Set a metal post 4'± SW of the corner with a Forest Service monument sign and K-tag attached.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties

Bearing Trees per BLM 1974 Resurvey

1. A Ponderosa Pine, 34.9" dia., with a healed blaze, bears N 86° 52' E, 56.76'.
2. A Digger Pine, 29.7" dia., with visible scribing, bears S 65° 26' W; 58.21'.

Cap Inscription

T 8 S
 R 22 E R 23 E
 S 12 | S 7
 S 13 | S 18
 1974

New Bearing Trees


3. A Black Oak, 25.4" dia., with healed blaze, bears N 76° 04' W; 32.12'.
 (Distance measured to old N&S in side-center of tree)
 4. A forked Black Oak, 50.2" dia. (measured below fork), bears N 13° 59' W; 74.98'.
 (Distance measured to old N&S in side-center of tree)
 5. A Ponderosa Pine, 17.1" dia., bears S 43° 34' E; 179.18'.
 - Corner is S 87° 49' 34" E; 2747.48' from N 1/4 corner Section 13 8/22.
 - Corner is N 0° 28' 54" E; 651.91' from N-N 1/64 corner Section 13 8/22.
 - Corner is 1' NW of fence junction, from which fences run N, S, & W.
 - Corner is 10 1/2' W of a driveway which runs N & S.
- Bearing are to the center of trees at base. Distances are horizontal to a nail and tag (stamped JS 4689) driven into the side-center of the root crown, unless otherwise noted.

- Posted monument on tree #2.
- Posted BT signs on trees 2, 3, & 4.

J-1
 2-25

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON _____

SIGNED: _____
 L.S. or 30%

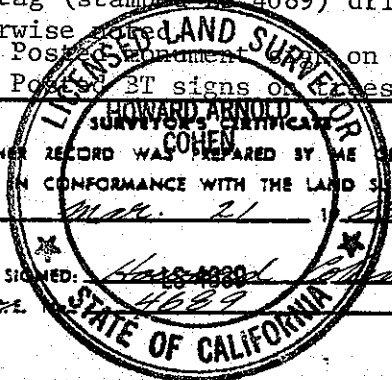

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19____
 AND EXAMINED AND FILED BY: _____
 TITLE: _____

DOCUMENT No. _____
 STATEMENT ON BACK OF SHEET