


CORNER RECORD

COUNTY OF Madera T. 8 S R. 23 E M.D.B. & MERIDIAN CALIFORNIA
 CORNER TYPE: GOVT. CORNER MEANDER RANCHO CONTROL OTHER
 CORNER IDENTIFICATION - DATE OF VISIT December 16 19 82



Northwest corner Section 20 8/23
 (Common to sections 17, 18, 19, & 20)

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT
 PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found and Accepted: A 1 3/8" O.D., I.P., 38" long, up 6", tagged LS 2737.
 Found 1 original bearing tree per GLO notes of J.R. Glover,
 U.S. Surveyor 1878.

PHYSICAL DESCRIPTION OF MONUMENTS RESULT OR PERPETUATED
 Remonumented with standard F.S.M., up 4". Built a rock mound 1' at the base and 1/2' high around monument. Buried found monument inverted 6" east of F.S.M., down 8". Set a metal post with K-tag and Attention sign 4'± NE of corner. F.S.M. - Aluminum monument, 2-1/2" O.D., 30" long with a 3-1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties: Cap Inscription

Original Bearing Tree T 8 S R 23 E

- | | |
|--|-------------|
| 1. A White Oak, 25.7" dia., with an open blaze and traces of original scribing, bears S 43° 18' W: 62.80'. | S 18 S 17 |
| | S 19 S 20 |


New Bearing Objects LS4689
1982

2. A P.K. nail and tag (LS 4689) in the root crown of a forked live oak, bears N 7° 11' 52" E; 25.05'
3. A Digger Pine, 10.4" dia., bears S 17° 32' E; 4.09'
4. A forked Live Oak 21" dia. main trunk, bears N 34° 18' W; 135.70'
 - Corner is S 0° 00' 13" E; 2664.88' from West 1/4 corner S. 17 8/23.
 - Corner lies 8" NW of fence intersection.
 - Fences run north, south, and east from corner.
 - Corner is 8' ± west of centerline of a 10' wide dirt road.

Bearings are to the center of trees at base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.

Found Forest Service Monument and Bearing Tree signs on trees 1, 2, & 4. Blazed and scribed tree #4 and stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions."

N-5
2-30

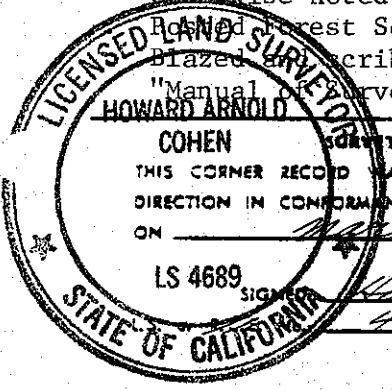

COUNTY SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON 12 21 19 82
 LS 4689 SIGNATURE Howard Cohen
4689

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19____ AND EXAMINED AND FILED _____ 19____
 BY: Howard Arnold Cohen
 TITLE: _____
 DOCUMENT No. _____
 STATEMENT ON BACK OF SHEET