


CORNER RECORD

COUNTY OF Madera T. 8 S R. 23 E M D R & MERIDIAN CALIFORNIA
 CORNER TYPE: GOV'T. CORNER MEANDER RANCHO CONTROL OTHER
 CORNER IDENTIFICATION — DATE OF VISIT January 8 1985



West 1/4 corner of Section 19, T. 8 S, R. 23 E.
 Common to Section 19 8/23 and Section 24 8/22.

CORNER — LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER REBUILT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found and Accepted: A 3" diameter P.G. & E. brass cap, set flush in concrete 1' in diameter, flush with the ground, stamped for the corner and with LS 2741. This monument is locally recognized and appears on many survey plats filed in the Madera County Records. It is accepted as the best available evidence of the original corner position.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

Built a rock mound 3'x3'x1' high around monument, set a metal post with a Forest Service monument sign attached 4 ± NE of monument.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties:

1. A Black Oak, 20.7" dia. (with an open blaze, no scribing) bears N 9° 22' E, 68.9'. (no nail)
2. A P.K. nail and tag (LS 4689) in the centerline of the old road to North Fork, bears S 48° 54' 05"E, 48.86'.
3. A Black Oak, 15.2" dia., bears S 23° 40'E, 74.29'.
4. A P.K. nail and tag (LS 4689) in the centerline of the old road to North Fork, bears S 31° 21' 01" W, 49.06'.
5. A forked Live Oak, 16.5" dia. at the base, bears S 84° 30'W, 8.10'.
6. A chiseled '+' in a rock 2'x1/2'x1' high, bears N 85° 48' 59" W, 47.91'.

Cap Inscription


LS 2741
 SEC 24 T8S R22E
 1/4 . COR
 SEC 19 T8S R23E

.The corner lies S 51 1/2° W, 670' ± from the intersection of Madera County roads 200 & 222 (Auberry Road).

. Bearings are to the center of trees at the base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown, unless otherwise noted.

. Posted Forest Service ~~marked~~ and ~~marking~~ Tree signs.

SURVEYOR'S CERTIFICATE
 THIS CORNER RECORD WAS REBUILT BY HOWARD ARNOLD
 IN CONFORMANCE WITH THE LOS ANGELES SURVEYORS ACT
 ON MAY 28 1985
 SIGNED: Howard Arnold
 L.S. # 4589 No. 4589

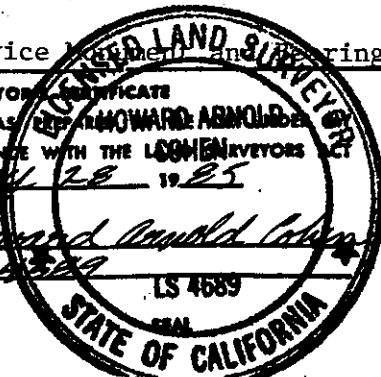

COUNTY SURVEYOR'S CERTIFICATE
 THE CORNER RECORD WAS RECEIVED _____ 19____
 AND EXAMINED AND FILED _____
 BY: Howard Arnold
 TITLE: _____

DOCUMENT No. _____

STATEMENT ON BACK OF SHEET

YES NO