


CORNER RECORD

COUNTY OF Madera T. 6S R. 22E M. D. B. & MERIDIAN CALIFORNIA

CORNER TYPE: GOV'T. CORNER MEANDER RANCHO CONTROL OTHER

CORNER IDENTIFICATION - DATE OF VISIT June 30 1983



North 1/4 corner Section 18 6/22.

(Common to Sections 7 and 18)

CORNER - LEFT AS FOUND FOUND AND TAGGED REESTABLISHED OBLITERATED CORNER RESULT

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

Found no evidence of original corner monument or accessories. Corner position established by proportionate measurement.

PHYSICAL DESCRIPTION OF MONUMENTS RESULY OR PERPETUATED

Set F.S.M., up 6", no rock mound. Set a metal post with a Forest Service Monument sign and K-tag 4' NW of corner.

F.S.M. - Aluminum monument, 2-1/2" O.D., 30" long with a 3-1/4" O.D. aluminum cap; stamped for the corner, with LS 4689, the date and the Forest Service logo.

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST SECOND THIRD
 STATIONS USED: NGS (USC & GS) STATE COUNTY OTHER STATION _____ STATION _____
 ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Corner Ties

Cap Inscription

1. A Black Oak, 46.8" dia., bears N 28° 40'E; 79.06'.
2. A Power Pole, bears N 57° 15'E; 64.89'.
Note: Distance is to a nail and tag (LS 4689) in the side-center of the pole at the base.
3. A Ponderosa Pine, 28.6" dia., bears S 0° 10'W; 22.67'.
4. A Ponderosa Pine, 30.6" dia., bears N 40° 25'W; 83.74'.
5. A Ponderosa Pine, 37.7" dia., bears N 5° 57'W; 98.79'.
6. An Incense Cedar, 12.1" dia., bears S 79° 34'E; 28.39'.

T6S R 22 E

S 7

1 1/4

S 18


LS 4689
1983

Set a 1 1/4" O.D., I.P., 32" long, up 6" on property line, N 2° 26' 42"E; 161.86'. Set a P.K. nail and tag in top, stamped: USFS

P | L

(Continued on other side)

J-3
LS 4689 2-24

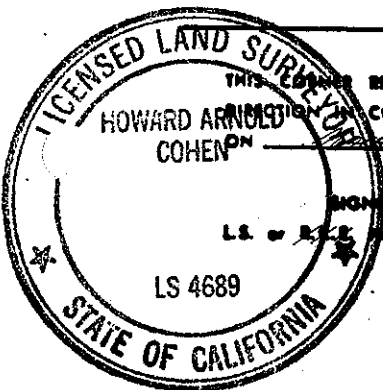

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY SUPERVISION IN CONFORMANCE WITH THE LAND SURVEYORS ACT

SIGNED: Howard Arnold Cohen
 L.S. or P.K. No. 7-1-4689

SEAL

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED AND EXAMINED AND FILED

BY: [Signature]
 TITLE: _____

DOCUMENT No. _____

STATEMENT ON BACK OF SHEET

YES NO

- Corner is 58' SW of a 3 wire fence.
 - Corner is 25' SW of a dirt road
 - Corner is 40' South of a fork in dirt road.
-
- Bearings are to the center of trees at base. Distances are horizontal to a nail and tag (stamped LS 4689) driven into the side center of the root crown.
 - Posted Forest Service Monument and Bearing Tree signs.
 - Blazed and scribed trees and stamped monument in accordance with the BLM 1973 "Manual of Surveying Instructions."

0622140500

